

The *SPIRIT* Scheduler


The *SPIRIT* Scheduler allows users to submit observation requests that are automatically scheduled. It is the default mode of operation for all new *SPIRIT* telescopes, unlike the 'live observing' modes used for the original *SPIRIT 1 & 2* telescopes.

What is a scheduler?

A scheduler is an advanced piece of software that combines image requests from many users and dispatches them according to target visibility and optional user-defined constraints. It takes all of the work out of figuring out the best time to image a target of interest, while also making telescope use more efficient and productive. Unlike live observing modes, users do not book or interact with the telescope in real time, though requests and live telescope operations can still be monitored via the *SPIRIT* web interface.

Using the *SPIRIT* Scheduler

The *SPIRIT* Scheduler menu is accessed from the *SPIRIT* web interface. There are two menu options:

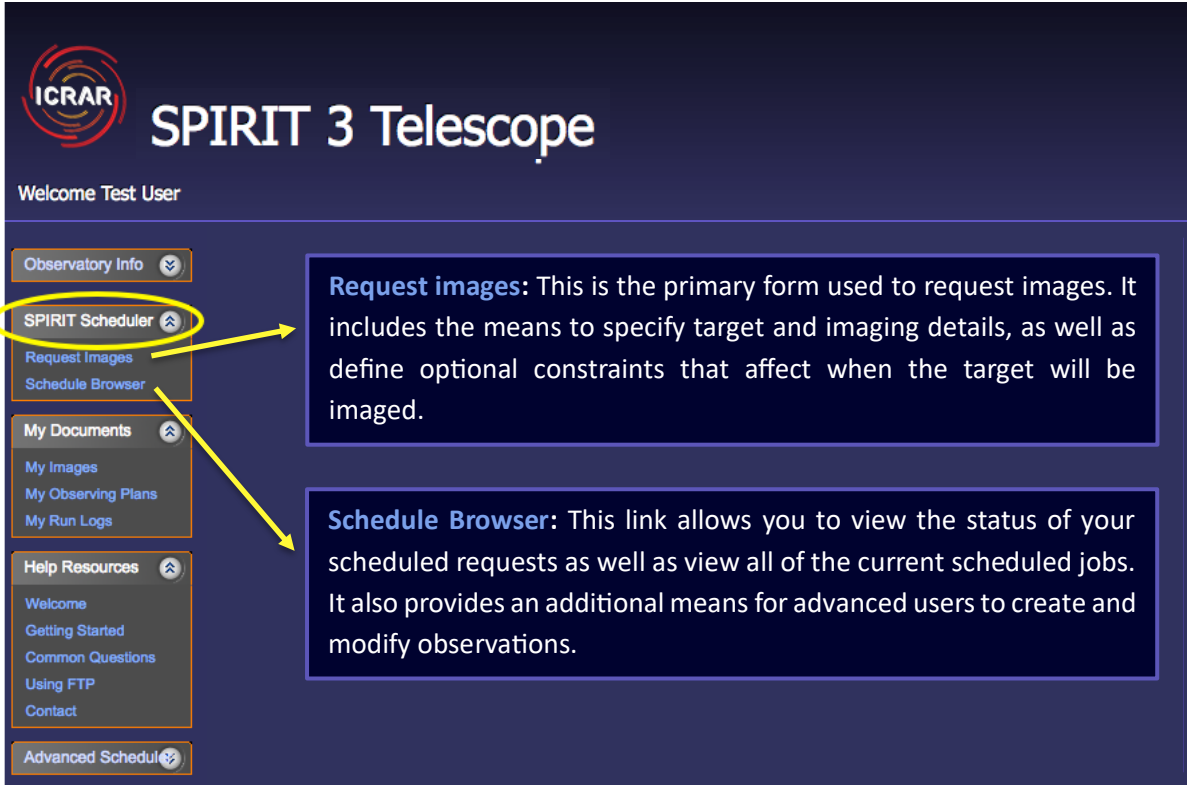

The screenshot shows the SPIRIT 3 Telescope web interface. The header includes the ICRAR logo and the text "SPIRIT 3 Telescope" and "Welcome Test User". A navigation menu on the left contains several sections: "Observatory Info", "SPIRIT Scheduler", "My Documents", "Help Resources", and "Advanced Scheduler". The "SPIRIT Scheduler" section is highlighted with a yellow circle and contains two sub-items: "Request Images" and "Schedule Browser". Two callout boxes with blue borders and white text provide descriptions for these items. The first callout box, titled "Request images", explains that it is the primary form for requesting images and allows for specifying target and imaging details, as well as optional constraints. The second callout box, titled "Schedule Browser", explains that it allows users to view the status of scheduled requests and current jobs, and provides a means for advanced users to create and modify observations. Yellow arrows point from the "Request Images" and "Schedule Browser" menu items to their respective callout boxes.

Request images: This is the primary form used to request images. It includes the means to specify target and imaging details, as well as define optional constraints that affect when the target will be imaged.

Schedule Browser: This link allows you to view the status of your scheduled requests as well as view all of the current scheduled jobs. It also provides an additional means for advanced users to create and modify observations.

Instructions

Requests can be made well in advance at any time during the day or night. The form has three main sections that must be completed.

1. Start by selecting or entering your name and institution

If you have used the *SPiRiT Scheduler* on this telescope before, select your name from the drop-down list.

If this is your first time, create a yourself as a new 'project'



IMPORTANT: Ensure the project title includes your institution and full name:

Example 1: *UWA Phys 3003 Alice Smith*


Example 2: *Willetton SHS, Tom Jones*

2. Enter the target and imaging details

The format and use should be familiar to you if you have used *SPiRiT* before.

Enter target name and select 'Get Coordinates' or manually enter the object's J2000 coordinates. Enter your image count, filter and exposure details.

*Hint: For multiple images that will be stacked later, small movements between successive images, called "dithering", can help to average out defects on the CCD sensor. A default random dithering can be applied by entering -1.0 into the **Dithering** box.*

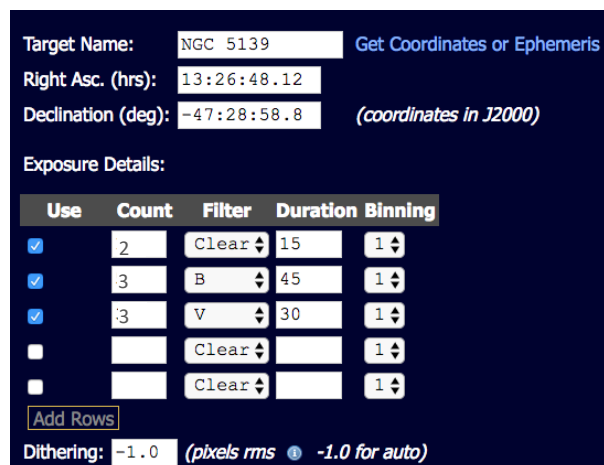


Use	Count	Filter	Duration	Binning
<input checked="" type="checkbox"/>	2	Clear	15	1
<input checked="" type="checkbox"/>	3	B	45	1
<input checked="" type="checkbox"/>	3	v	30	1
<input type="checkbox"/>		Clear		1
<input type="checkbox"/>		Clear		1

Important: Before proceeding, double check your target and exposure details.


3. Submit your request:

Ensure this box is checked

Click "Submit" ONCE.

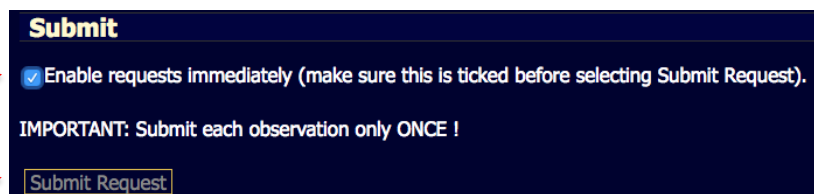

Success !



The Schedule Browser

After creating your first project, you should add your email address to receive automated notifications on the status of your imaging:

ACP Expert at SPIRIT III Telescope

This project belongs to Willetton Student 18

Project Name: Willetton SHS Tom Jones
Description: Submitted via web photometry form.
Observers:
External ID:
Contact Name: Willetton Student 18 [ACP willeton18]#
Contact Mail: tom.jones@email.here
Contact Org:

Pause Save Changes Delete

Resubmit All Plans Resubmit Failed Plans Disable All Plans

The Schedule Browser allows you to view the status of all requests. It also allows you to modify or delete your existing requests. The Schedule Browser presents additional features in your plans and observations that you should avoid modifying unless you are an advanced user of the *SPIRIT Scheduler*.

IMPORTANT: Avoid using the Schedule Browser to create new projects, plans or observations. Always use the *Request Images* web form to create new requests.

While it is possible to use the browser to resubmit failed plans, you should first ascertain the reason why the observations failed before resubmitting (otherwise the plan may simply fail again). Inspect your log files for information or seek help.

Downloading Images

Images and log files should always be downloaded using FTP, rather than the web *My Documents* interface. Contact us for information on how to use FTP.

Optional constraints

The *Request Images* form has optional sections that can be used to further refine the observing parameters. Avoid specifying constraints unless you are an advanced user or have specific requirements. It is easy to create impossible scenarios if you over specify constraints. For example, a target that never reaches a specified altitude within an hour angle constraint on a night where the moon is up, etc.

Optional Constraints (click here to expand)

IMPORTANT: Use with CAUTION !

Horizon: Target to be imaged above this altitude (degrees)

Hour Angle: Target to be imaged within this HA range (Hours -E, W)

Air Mass Range: Target to be imaged within this air mass range (max, min) Use with CARE

Moon Avoid: Moon avoidance in distance (degrees) and phase (days) Moon Avoid Help

Moon Down: Target to be imaged only when moon is below below horizon

Sky Condition: Target imaged only if sky conditions are at least this good

- The Scheduler will always allow your object to rise higher in the sky than the minimum specified horizon limit, particularly if there are few active requests.
- Hour angle is defined east and west of the meridian using -ve and +ve integers respectively. For example, using a range of -1 to 1 will only image the target when it is within 1 hour of the meridian.

Tip: use Stellarium to check that your target does in fact reach any altitude or hour angle constraints you specify for the time frame you hope to acquire your images.

- Air Mass can be used optionally to define a target altitude constraint.
- Moon avoidance requires two parameters. These are explained in detail by selecting [Moon Avoid Help](#). If in doubt, leave blank. Avoid checking *Moon Down* unless you absolutely require images to be taken when the moon is below the horizon.
- Sky condition can be ignored for SPIRIT use.

Priority and Series

The priority and series section includes additional advanced options.

Priority and Series

Priority: (Optional. Prioritise your targets. Higher number = higher priority)

Repeat Series: Repeat entire image set this many times (see help for details)

Time Spacing: (sec, start to start) Spacing Tol: (sec, early/late)

Best Efforts: For very long series imaging only (will run even if series terminates early)

- The priority field allows you to assign arbitrary priority for your targets. Use this only if you wish to define *relative importance* to a number of different targets in your list.
- Repeat series provides options for multi-band imaging. The default (Repeat Series = 1) will acquire the images you have specified once. The entire imaging sequence can be repeated by setting a value greater than 1 which effectively provides two different options for obtaining multiple sets of filtered images:

For example, you wish to obtain a set of B,V,R images for a target and you want 5 images through each filter:

- Specifying a Count of 5 for each filter and leaving Repeat Series set at 1 will produce B,B,B,B,B, V,V,V,V,V, R,R,R,R,R in that order for your target.
- Leaving the Count as 1 but changing the Repeat Series to 5 will instead produce the sequence as B,V,R, B,V,R, B,V,R, B,V,R, B,V,R for your target.

If you increase the number of *Repeat Series*, you will also be presented with optional *Time Spacing* and *Spacing Tolerance* settings. These can be left blank unless you require gaps between your sets, such as those that might be used when obtaining data to produce the light curve of a variable star.

- *Time Spacing* is the time between the start of each set. It is important to allow sufficient 'spacing' for each set of images to complete with the specified time.
- *Spacing Tolerance* provides some leeway for starting the next series which can be useful on a busy night.

In the following example, the image series will be undertaken 3 times (Repeat Series = 3), with a spacing of 30 minutes between the start of each set (Time Spacing = 1800 sec), and a tolerance of 5 minutes (Spacing Tol: = 300 sec).

Priority and Series

Priority: (Optional. Prioritise your targets. Higher number = higher priority)

Repeat Series: Repeat entire image set this many times (see help for details)

Time Spacing: (sec, start to start) Spacing Tol: (sec, early/late)

Best Efforts: For very long series imaging only (will run even if series terminates early)

- Best Efforts is useful for very large repeat series that span more than one night. It forces the series to run even if the scheduler determines that it can't fit into the available hours of a single night.